
Drg No. QDF6M

REMOVE ALL BURRS AND SHARP EDGES.

THIRD ANGLE PROJECTION.

		INCH	MM	
CROWN WHEEL BOLT PCD	D1	0	0	ļ
No. OF BOLTS		0	0	l
THREAD / THRO' HOLE		0	0	ł
CROWN WHEEL SPIGOT DIA	D2	5.5190	140.2	ł
BEARING DIA	D3	1.6529	42.0	ļ
	D3/A	1.7318	44.0	ļ
	D3/B	3.9388	100.0	
BEARING DISTANCE	L1	5.720	145.3	ł
SPIGOT LENGTH	L2	1.770	45.0	ł
	L2/A	1.135	28.8	ļ
OVERALL LENGTH	L3	7.490	190.2	ł
BEARING/CROWN WHEEL	L4	0.923	23.4	ł
BORE	D4	1.093	27.8	ł
	D5	2.800	71.1	
DRIVE SHAFT SPLINE:-				
No. OF TEETH		23		
PITCH		24/48 DP		l
TYPE		FILLET ROOT	SIDE FIT	l
PRESSURE ANGLE		45 DEG		

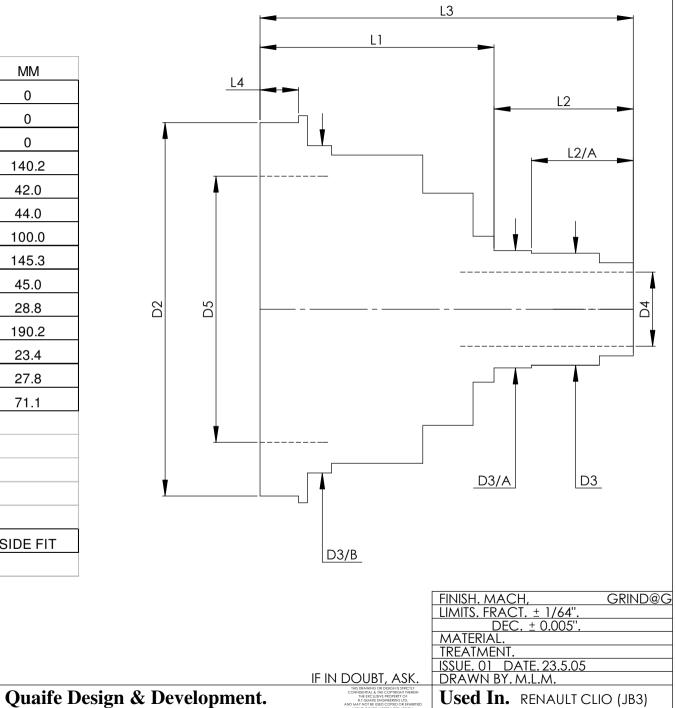

Drg. No. QDF6M