
		INCH	MM
	D 4		
CROWN WHEEL BOLT PCD	D1	3.543	90
No. OF BOLTS		8	8
THREAD / THRO' HOLE		M12x1.25	M12x1.25
CROWN WHEEL SPIGOT DIA	D2	4.1730	106.0
BEARING DIA	D3	1.457	37.0
BEARING DISTANCE	L1	2.426	61.6
SPIGOT LENGTH	L2	0	0
	L2/A	0.638	16.2
OVERALL LENGTH	L3	3.064	77.8
BEARING/CROWN WHEEL	L4	0	0
BORE	D4	1.025	26.0
	D5	1.05	26.7
DRIVE SHAFT SPLINE:-			
No. OF TEETH		23	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

REMOVE ALL BURRS AND SHARP EDGES.

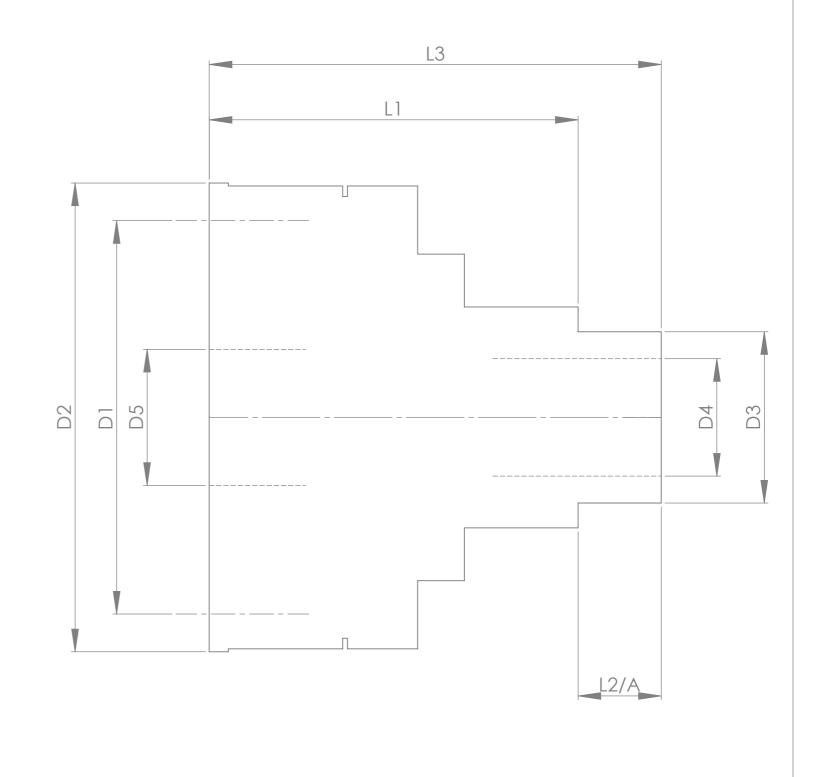

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF7M

Quaife Design & Development.

IF IN DOUBT, ASK.

 \mathbf{U}

FINISH. MACH, GRIND@G
LIMITS. FRACT. ± 1/64".

DEC. ± 0.005".

MATERIAL.

TREATMENT.

ISSUE. 01 DATE. 25.6.08

DRAWN BY. H.R.

Used In. RENAULT 335 DIFF