


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.669	144
No. OF BOLTS		16	16
THREAD / THRO' HOLE		M12x1	M12x1
CROWN WHEEL SPIGOT DIA	D2	4.8816	124.0
BEARING DIA	D3	1.9708	50.0
	D3/A	2.2454	57.0
BEARING DISTANCE	L1	4.748	120.6
SPIGOT LENGTH	L2	0.900	22.9
	L2/A	1.395	35.4
OVERALL LENGTH	L3	7.043	178.9
BEARING/CROWN WHEEL	L4	1.673	42.5
BORE	D4	1.378	35.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		24	
PITCH		20/40 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

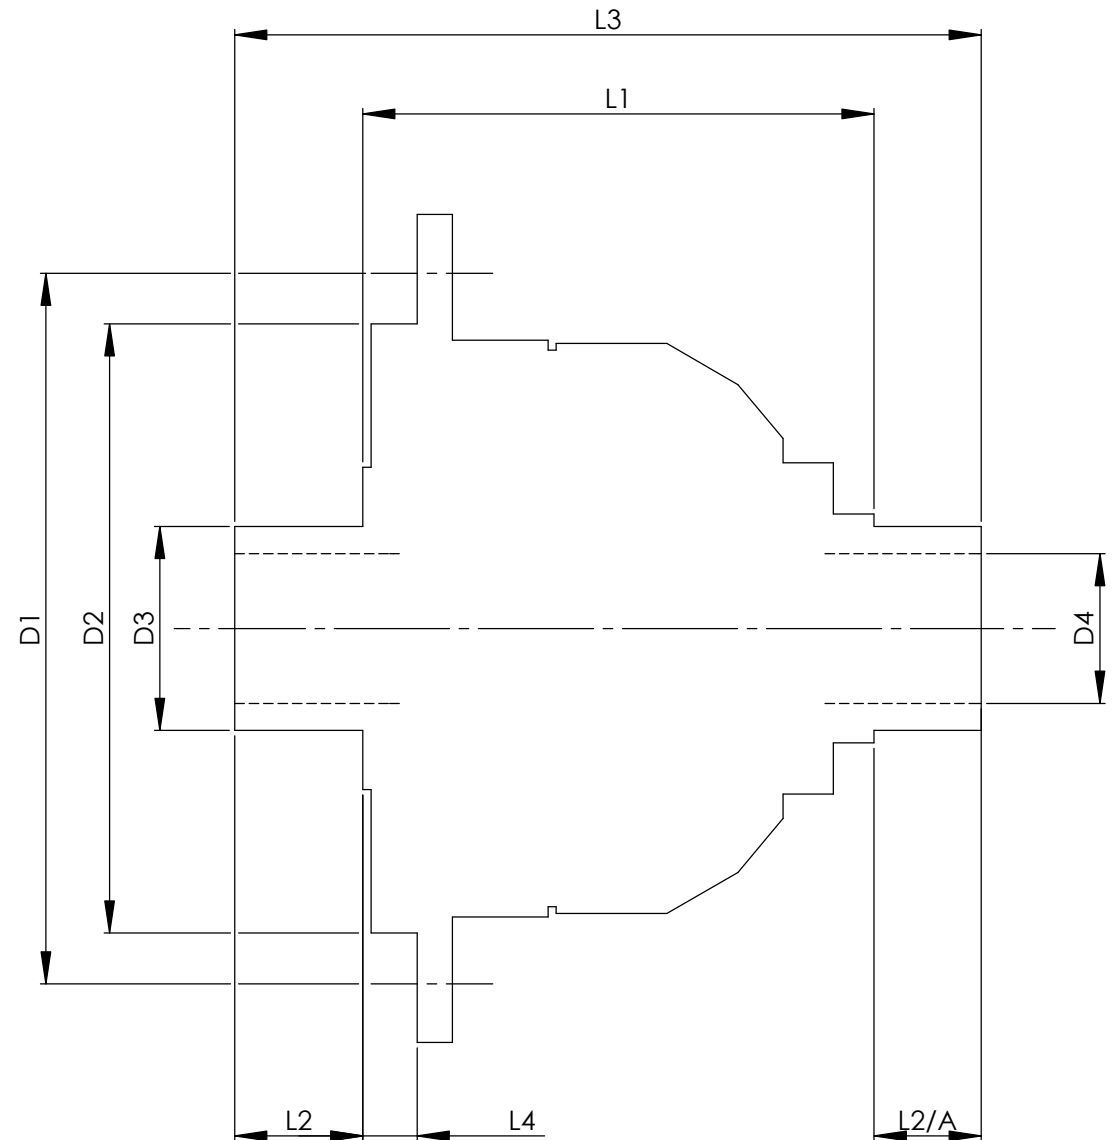

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF17E

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 20.5.05	
DRAWN BY. M.L.M.	

Used In. TOYOTA MR2 (Turbo)