


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.250	133.4
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.391	9.9
CROWN WHEEL SPIGOT DIA	D2	4.375	111.1
BEARING DIA	D3	1.5018	38.1
BEARING DISTANCE	L1	5.300	134.6
SPIGOT LENGTH	L2	0.825	21.0
	L2/A	0.825	21.0
OVERALL LENGTH	L3	6.950	176.5
BEARING/CROWN WHEEL	L4	1.570	39.9
BORE	D4	1.063	27.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		24	
PITCH		24/48 DP	
TYPE		FILLET ROOT	SIDE FIT
PRESSURE ANGLE		45 DEG	

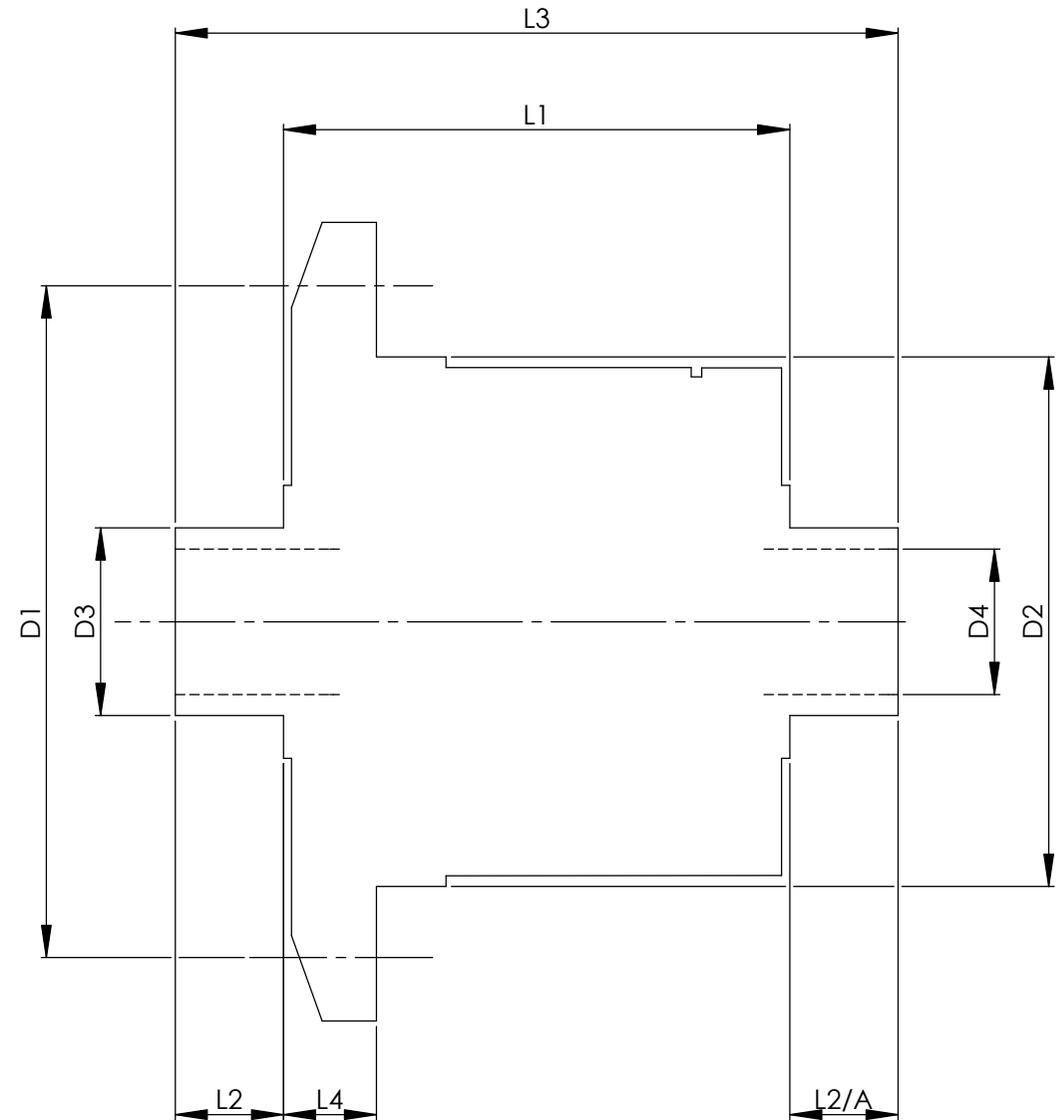

TITLE R.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF23K

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUARRE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 20.5.05	
DRAWN BY. M.L.M.	
Used In.	Triumph Stag, TR2, TR3, TR3A, TR4A, TR5, TR6 & Dolomite Sprint