

		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.159	131.0
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.413	10.5
CROWN WHEEL SPIGOT DIA	D2	4.4096	112.0
BEARING DIA	D3	1.7729	45.0
BEARING DISTANCE	L1	4.202	106.7
SPIGOT LENGTH	L2	0.84	21.3
	L2/A	0.873	22.2
OVERALL LENGTH	L3	5.915	150.2
BEARING/CROWN WHEEL BORE	L4	1.201	30.5
	D4	1.064	27.0

DRIVE SHAFT SPLINE:-

No. OF TEETH

24

PITCH


24/48 D.P.

TYPE

FILLET ROOT SIDE FIT

PRESSURE ANGLE

45°

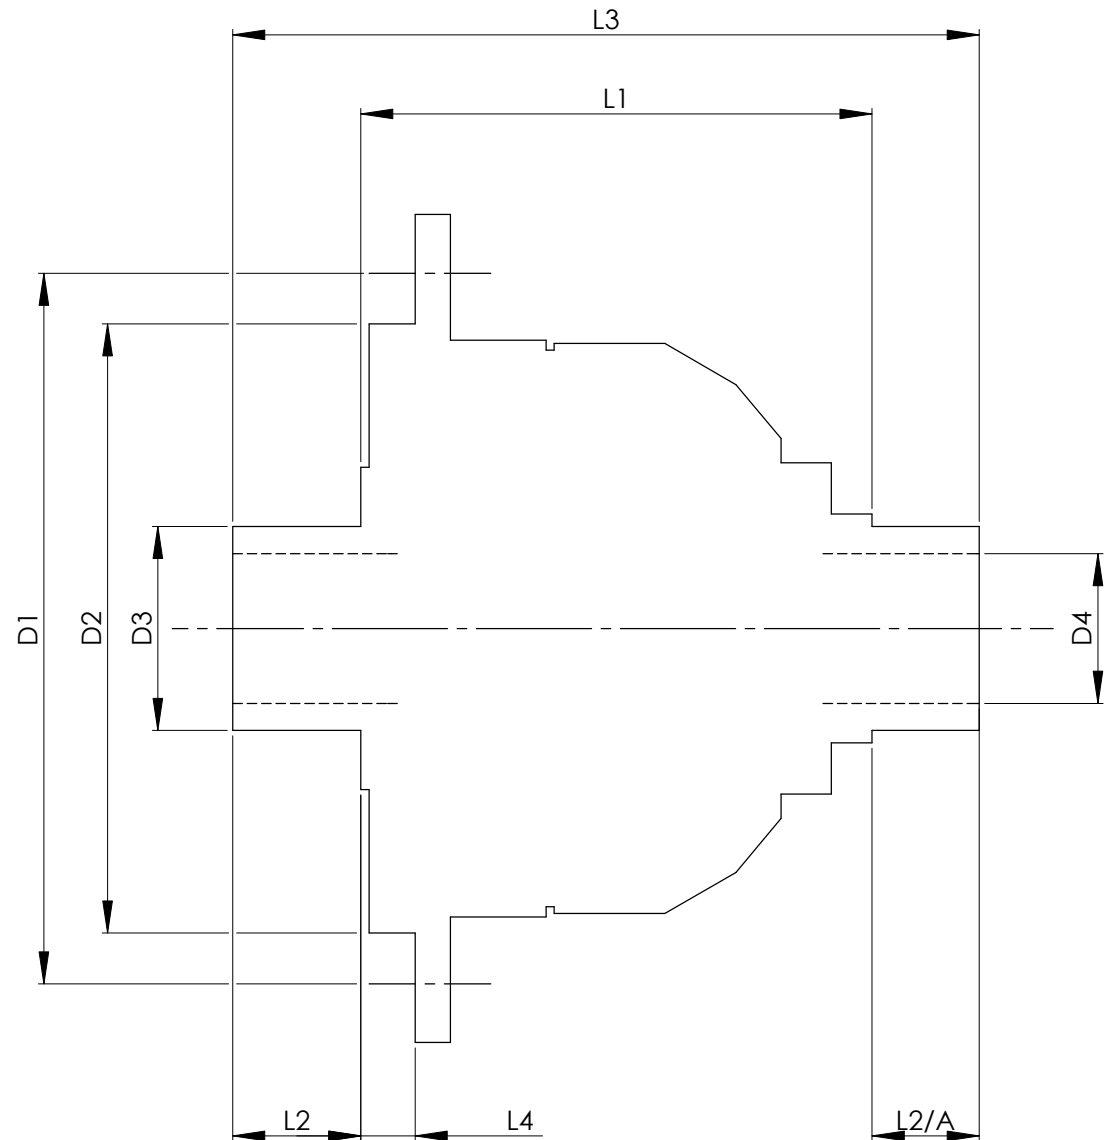

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S.

SHEET 1 OF 1

Drg. No. QDH2K

IF IN DOUBT, ASK.

Quaife Design & Development.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH, GRIND@G

LIMITS. FRACT. ± 1/64"

DEC. ± 0.005"

MATERIAL.

TREATMENT.

ISSUE. 01 DATE. 22.1.07

DRAWN BY. J.P.D.

Used In. FIAT UNO 1.3/1.4 TURBO PUNTO 1.4 GT DIFF.