


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.315	135
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.492	12.5
CROWN WHEEL SPIGOT DIA	D2	4.5285	115.0
BEARING DIA	D3	1.8122	46.0
BEARING DISTANCE	L1	5.236	133.0
SPIGOT LENGTH	L2	0.710	18.0
	L2/A	0.710	18.0
OVERALL LENGTH	L3	6.654	169.0
BEARING/CROWN WHEEL	L4	0.963	24.5
BORE	D4	1.1824	30.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

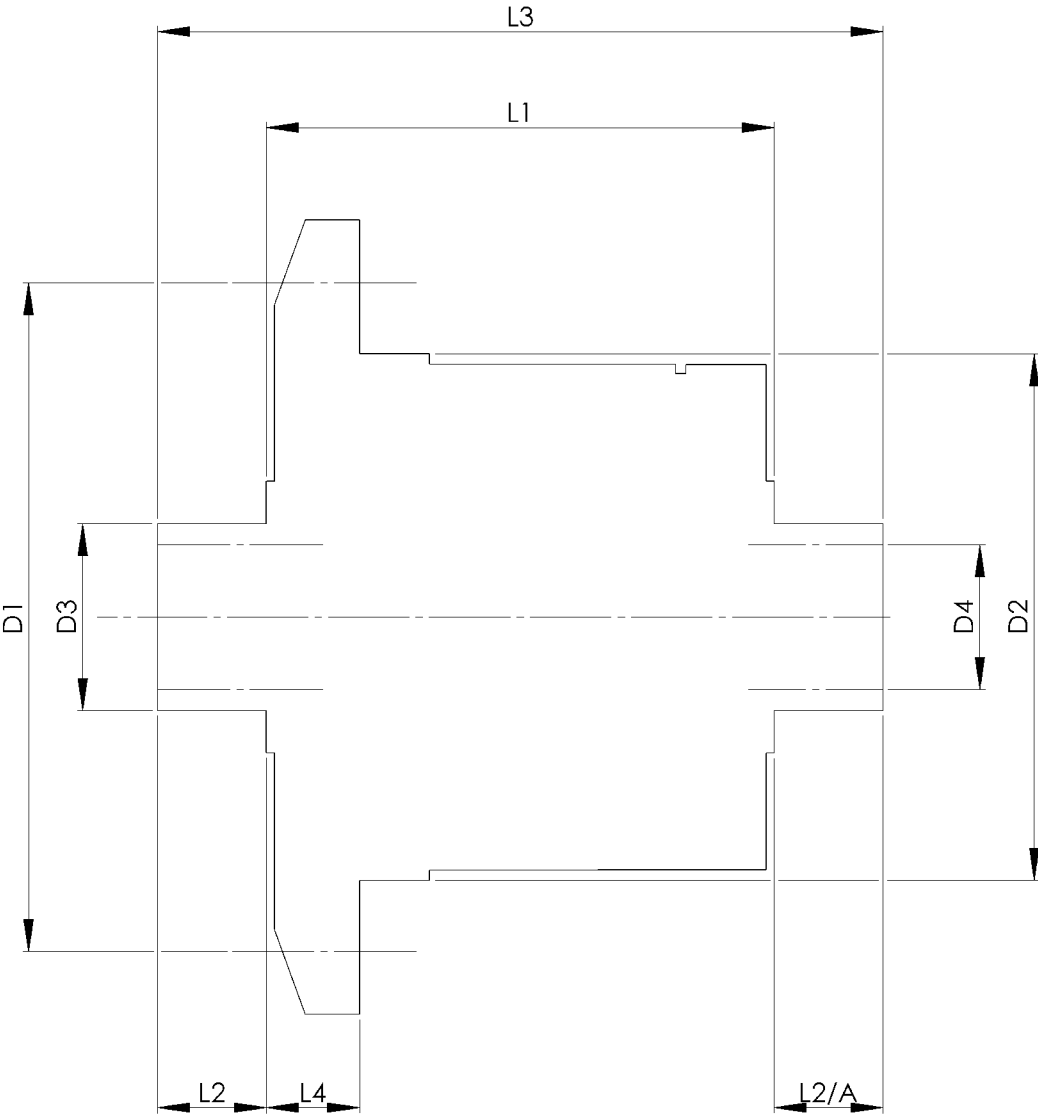

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF2N

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
IS THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. ± 1/64".	
DEC. ± 0.005".	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	
Used In.	BMW 325i (E30,E36) 525-535i (E28,E34), 633-635csi, 735i
	M3 (E30), (E36 -3.0L only) SOLID WORKS